


Basic Series



422

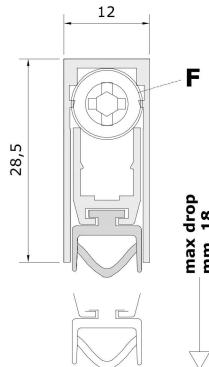

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

Certified for:

- Sound insulation 43 dB
- Fire resistance: 30 min. (EPDM standard gasket)
60 min. (optional silicon gasket)
- Insulation from smoke 2,16 m³ / h / m - 25 Pa
- Usage cycles 200.000 cycles


Protects from:

- Air
- Water
- Light
- Insects




Not an obstacle for disabled persons

STANDARD ACCESSORIES

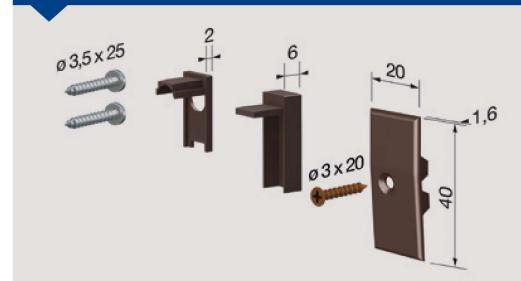

FASTENING SYSTEMS

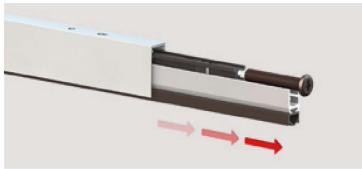

Remove and screw



MAIN APPLICATIONS



Wood door



PVC doors

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 40 pcs + 40 standard accessory packs.

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101	CA102	CA105	
CA201	CA202	CA203	CA204
CA205	CA207		

100 pcs pack

brown, white

2 Insulating nylon plate with silicon gasket

PIO01	PIO02	PIO02-R
PIO03	PIO04	PIO05

20 pcs pack

brown, white

3 Using brackets

SC002A	SC002B-422
--------	------------

20 pcs pack


steel, brown

Application examples

Smooth frame



Frame with ribbing

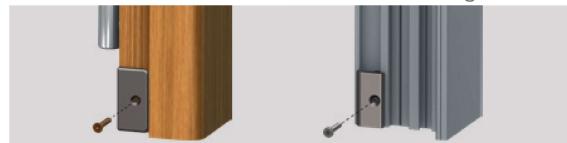

BUTTON (F): hexagonal brass, square nylon, bevelled nylon. **GASKET:** silicon tubular, brush



OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions